


## VOLUMETRIC SCREW FEEDER

- REMOVABLE TRANSMISSION
- AVAILABLE IN STANDARD AND SANITARY DUTY
- AUGER SIZES THROUGH 6"
- AUGERS CAN BE REMOVED FROM PROCESS OR NON-PROCESS SIDE

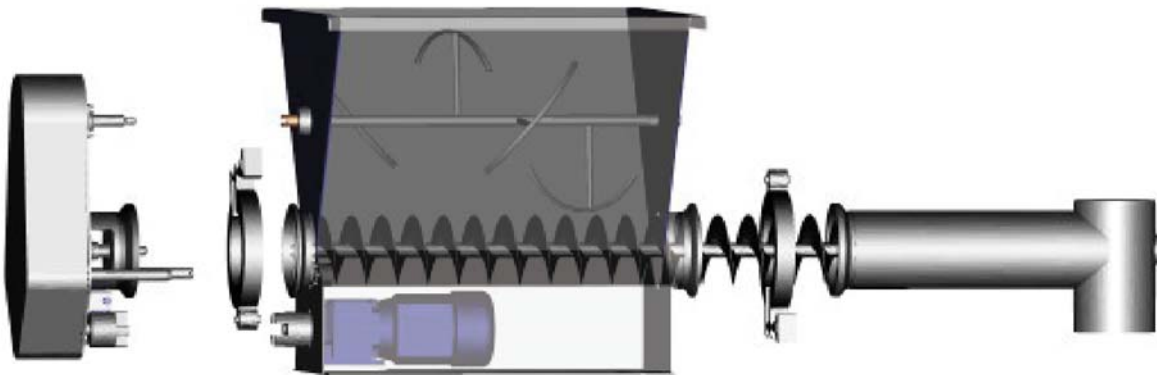

# VSF

IPA screw feeders feature a removable transmission designed to allow rapid repair and cleaning. Spare transmissions are available allowing the feeders to be put back into service quickly. The augers can be easily removed from the process or non-process side of the machine. The design is compact and sanitary with a single drive motor contained within the feeder body for the ultimate in sanitary performance. All units are available with an intermittent motion agitator to ensure even stubborn products flow properly. The agitator design gently pushes product toward the drive end of the main auger(s) to help ensure the auger flights have a consistent fill. By using an intermittent motion design the effects of compaction on your product is reduced yielding a more consistent discharge flow rate.

The modular design of the IPA screw feeder helps protect your factories efficiency by allowing rapid replacement of components. All wear items are designed to be easily removed from the feeder allowing maintenance personell to rapidly replace components or take the assemblies to the maintenance shop for compnent replacement.

IPA Screw feeders are available in Standard and Sanitary duty versions with a loss in weigh scale assembly available for all models and sizes.



Industrial Process Automation, Inc.  
5650 Pirrone Road  
Salida, Ca 95368  
E-mail: [Sales@ipacontrol.com](mailto:Sales@ipacontrol.com)

Phone: (866) 730-7730  
Fax: (866) 419-4076

Web: [www.ipacontrol.com](http://www.ipacontrol.com)